




CITY OF LODI

PUBLIC WORKS DEPARTMENT



Sidewalk and Driveway with Planting Strip

1/4" scoring lines
match existing or
standard City of
Lodi spacing.

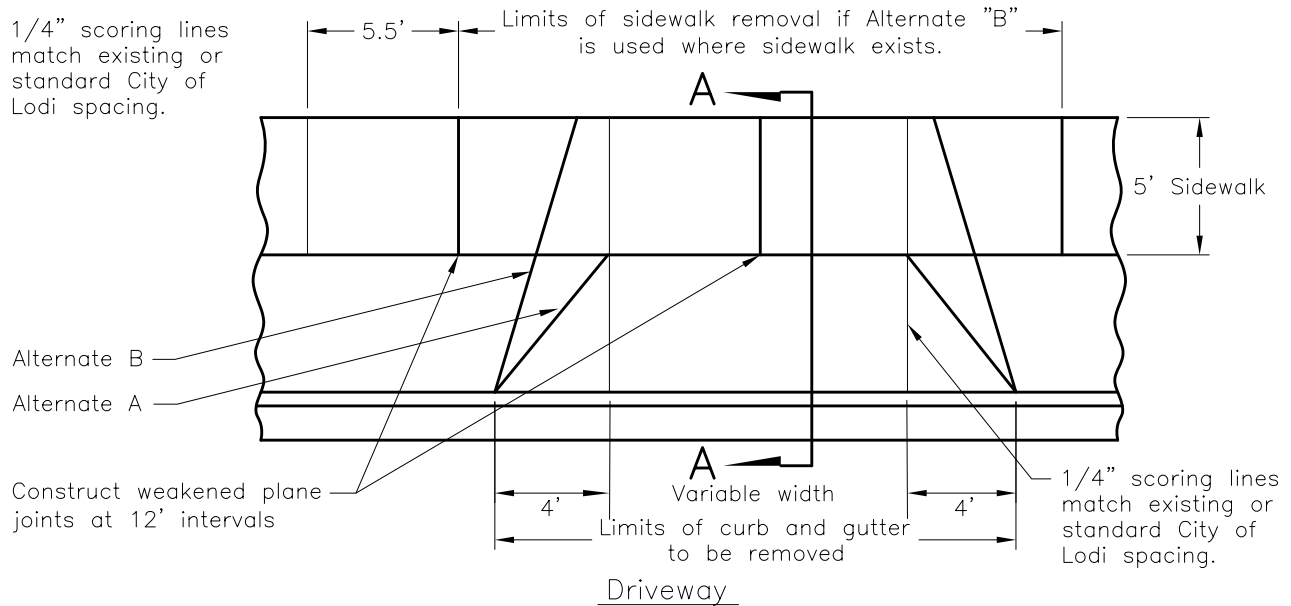


Curb and gutter to
match existing or
as specified on
the plans.

8"-90% R.C. Concrete
Subgrade Compaction
(See note 3)

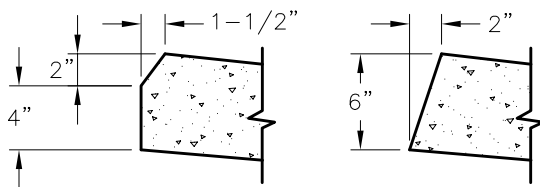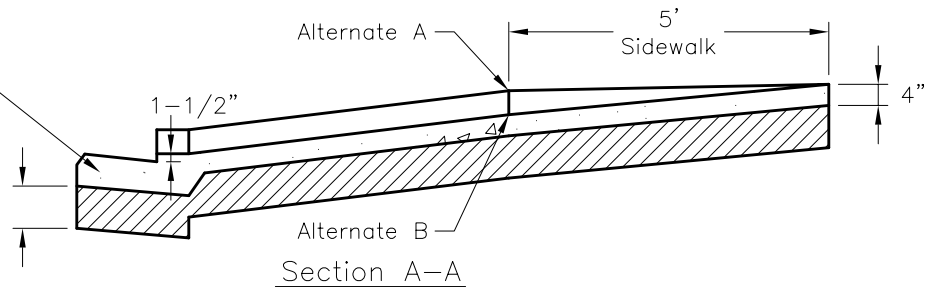

Detail

Alternate Toe Configurations

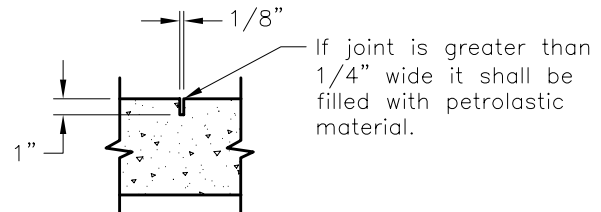

Detail

Weakened Plane Joint

Notes:

1. Alternate "A" shall be used, except where the driveway slope approaches 3 inches per foot. It may then be necessary to use Alternate "B".
2. When Alternate "B" is used sidewalk shall be removed to nearest score-mark by sawing. When the sidewalk is replaced the existing scoring pattern shall be maintained.
3. Additional compaction is not required where existing curb and gutter, sidewalk, and/or driveway are being removed and replaced.
4. Class B concrete per Section 90 of Std. Specs, 1-1/2" max. aggregate with impervious membrane cure and light broom finish.

Dr. K	No.	Date	Revision	Appr.	Approved By:	STD PLAN
Ch. WS	1	9/25	ADDED SCORE LINES		<i>F. Wally Sandelin</i>	121
Date					City Engineer	
12/00					R.C.E. 39895	
					9/25/02	
					Date	